
Drayton

Digistat⁺C RF Cylinder Thermostat

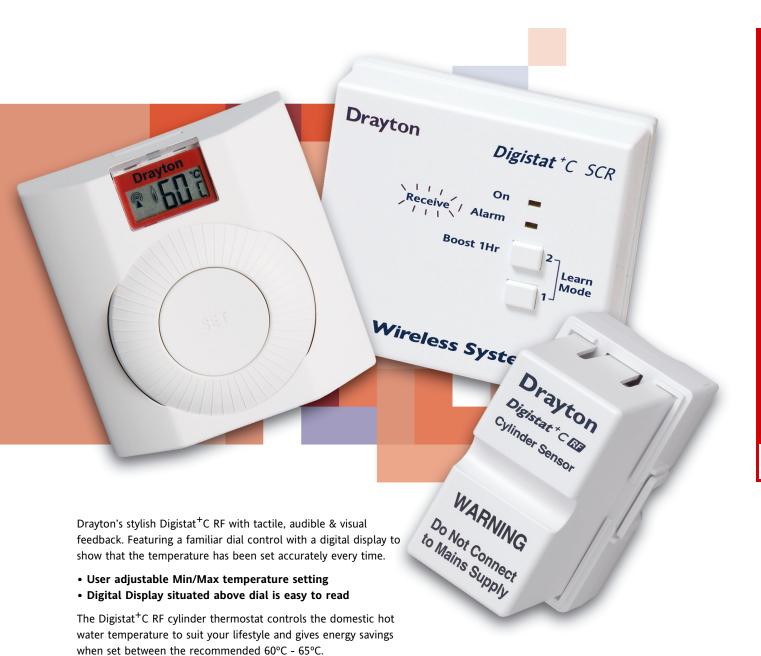


Drayton

Digistat⁺C RF Cylinder **Thermostat**

Features

- Conventional dial adjustment
- 5°C setting steps
- Tactile & audible feedback via click of the dial
- Visual feedback via digital display
- Min/Max temperature setting
- Battery powered
- Digital display situated above dial is easy to read

Dimensions

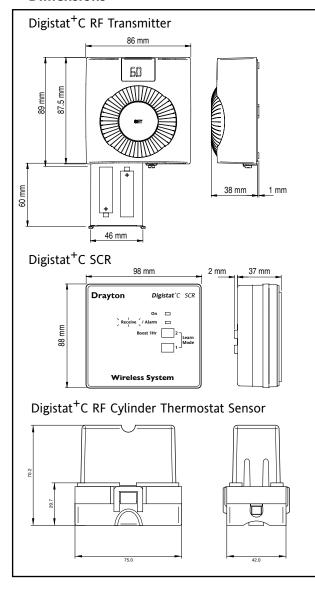


Technical Data


Digistat⁺C RF Transmitter/Sensor

Power supply		2 x AA Size, 1.5V alkaline batteries
Radio frequency		433 MHz
Signal range		30m typically. The range may be affected by the composition / density and number of walls between the Digistat ⁺ C RF and SCR.
Temperature Range		40 to 70°C
Control Accuracy		+0/-8°C
Ambient Temperature		Operating 0°C to 50°C Storage –20°C to 55°C
Mounting	Transmitter: Sensor:	Suitable for surface or outlet box mounting Direct mounting onto cylinder
Wiring		Ø 0.5mm ² 2 core cable between Sensor and Digistat ⁺ C RF Transmitter
D: : : +c		

Digistat ⁺ C SCR Receiver		
Power supply	230V a.c.	
Switch type	SPDT (volt free) relay	
Switch rating	2(1)A 230V a.c. or 24V a.c./d.c.	
Wiring	Designed for fixed wiring only, to comply with current IEE wiring regulations (BS7671)	
Relevant EC Directives	2006/95/EC Low Voltage Directive 2004/108/EC Electromagnetic Compatibility Directive 1995/5/EC R&TTE Directive 2006/66/EC Battery Directive	
Applied Standards:	EN60730-1; EN60730-2-9 ETSI EN 300 220-3; ETSI EN 301 489-3	

Wiring






i n v e. n s .9 s

Customer Service Tel: 0845 130 5522 Customer Service Fax: 0845 130 0622 Technical Helpline Tel: 0845 130 7722 Email: customer.care@invensys.com

Website: www.draytoncontrols.co.uk









D72-4